




**APLIK**  
 Design by Serge & Robert Cornelissen  
 Aluminium wall lamp available in several colours.  
 Typology: WALL

- Ratings
- Built in line voltage **LED** module
  - CCT 3000 K
  - Uplight
  - Surface installation over holes
  - Supply voltage ~220-240V
  - Switch mode: on-off dimmable trailing edge
  - Die cast aluminium body, painted

Product code composition

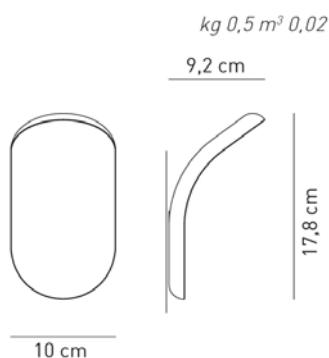

LIK				
Type	Article	Colours	Code End	Source
AP	LIK XXX	BC wrinkled white	XX	LED 16,6W - diffused beam <b>3000K</b> available on request <b>2700K or 4000K</b>
		BR matt bronze		
		NI matt nickel		

IP20 CRI90 **ADA** 220-240V<sub>Ac</sub> **LED** ~1480 lm 89 lm/W  
 example composition code |AP |LIKXXX |BR |XX |LED

Available colors



BC  
Wrinkled  
white

BR  
Matt  
bronze

NI  
Matt  
nickel

EELc (Energy Efficiency Label compatibility) contain built in LED lamps that cannot be changed: A, A+, A++

APLIKXXX\_XXLED

CUSTOMER \_\_\_\_\_ NOTES \_\_\_\_\_

\_\_\_\_\_

NOTICE:  
 Luminous flux (lm) and efficacy (lm/W) for all LED luminaires is based on nominal ratings of the LED sources.  
 Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.