



620/DIM/BD/L/1/BI Pipistrello

design gae aulenti, 1965

Thanks to the Tunable White Led (dynamic white) technology, the Pipistrello lamp is able reproduce the natural light pattern by modulating the color temperature of the LEDs.

Based on demands or needs, the user can modify the tone of white as they wish through the CASAMBI application that allows adjusting the color from 2400K to 6500K, enhancing even the most minute nuances, improving perception and featuring a high quality color rendering (Ra 90) without altering the colors. Height-adjustable, diffused light table or floor lamp. Satin-finish stainless steel telescope, white opal methacrylate diffuser. Base and upper knob in lacquered aluminum available in several colors.

Integrated and dimmable LED light source.

Electronic driver on the plug.

620/DIM/BD/L/1/BI pipistrello

| | | | |
|---------------------|----------------------------|----------------------------|---|
| family: | pipistrello | Body Color: | <input type="radio"/> other available colors <input checked="" type="radio"/> <input type="radio"/> <input type="radio"/> |
| Designers: | Gae Aulenti | Diffuser Color: | <input type="radio"/> |
| Utilization: | indoor | Body Materials: | stainless steel |
| Typology: | table lamps floor lamps | Diffuser Materials: | opal white methacrylate |

Certifications:

| | | | |
|--|--|--|--|
| | | | |
|--|--|--|--|

Market: This item is available in the following countries:
EUROPE

Dimensions

| | |
|------------------|------------|
| Width: | - |
| Height: | 66 - 86 cm |
| Length: | - |
| Depth: | - |
| Diameter: | 55 cm |

| | |
|-----------------------|---|
| Hole Diameter: | - |
| Hole Depth: | - |
| Net weight: | - |


Light Source

| | |
|-----------------------|--------------|
| Watt: | 14W |
| Lumen: | 1560 lm |
| Light Source: | led |
| CRI: | >80 |
| duration: | 50000 |
| CCT: | 2400 - 6500K |
| Energy degree: | A++ |

Device Specifications

| | | | | | |
|--------------------------|----------|----------------------------|---|-------------------------------|-----------|
| Type of emission: | diffused | Power cable length: | - | Driver: | - |
| Power: | - | Steel cable length: | - | Power supply assembly: | - |
| Light output: | - | Glow Wire Test: | - | Power supply: | - |
| Beam angle: | - | Impact Resistance: | - | Type of dimming: | bluetooth |
| | | | | Voltage: | - |

technical drawing

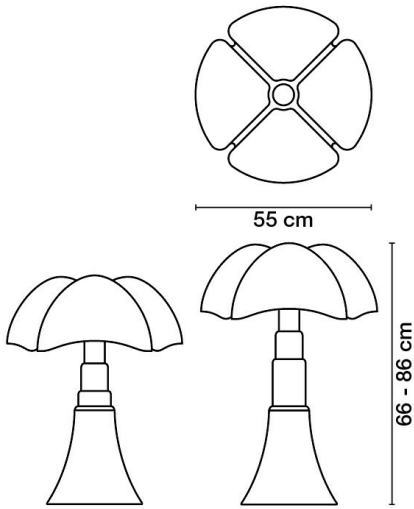


Dimensions

Width: -
 Height: 66 - 86 cm
 Length: -
 Depth: -
 Diameter: 55 cm

Hole Diameter: -
 Hole Depth: -
 Net weight: -

photometrics data

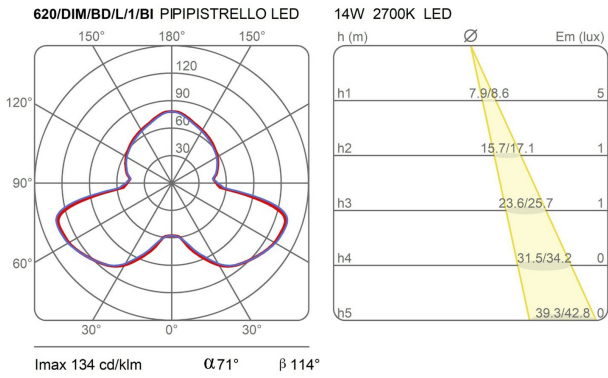



Pipistrello 620/DIM/BD/L/1/BI
design gae aulenti, 1965

